

FELCO 13 Classic

Pruning shear - High performance - Use with 1 or 2 hands

Made in Switzerland by FELCO



- **Reliable:** comfortable, light, sturdy handles made of forged aluminium with a lifetime guarantee* / blade and screw-mounted anvil blade made of high-quality hardened steel / clean, precise cut / all parts can be replaced
- **Efficient:** easy, durable cutting adjustment / wire cutting notch / sap groove
- **Ergonomic:** hand and wrist protection and optimisation of the force exerted are provided by the angled head, the ideal shape of the handles, and the cushion-shock absorber / non-slip coating

Our recommendation (1 ★: Recommended, 2 ★: Strongly recommended, 3 ★: Best fit)

| | |
|-------------------|-----|
| Viticulture | ★★★ |
| Arboriculture | ★★★ |
| Horticulture | ★★★ |
| Parks and Gardens | ★★★ |
| Small hand | ★★★ |
| Large hand | ★★★ |
| Left-handed | ★★★ |

The points of excellence




Forged aluminium handles guaranteed for life*

Lightweight, strong and sturdy thanks to special aluminium alloys and advanced precision forging methods perfectly mastered by FELCO.




Ergonomic tool

Inclined cutting head to reduce the risk of muscular-skeletal injuries and to maximise user comfort.

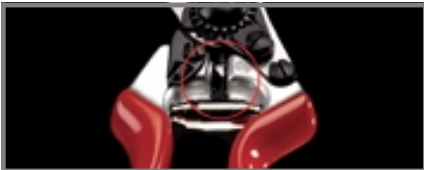

Shock absorption system

FELCO's special cushion stops reduce impact at the end of a cut, protecting hand and wrist.

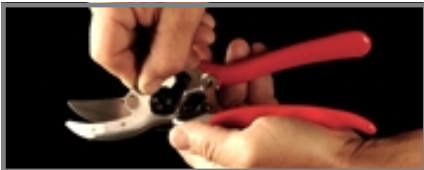

Precision adjustment system

FELCO's micrometric adjustment system guarantees an optimal adjustment of the cutting head throughout the life of the tool, and delivers a clean and precise cut every time.



Sap groove

The sap groove prevents the blade sticking when cutting "sappy" wood. It saves time and makes pruning easier by removing sap and debris after each cut.



Wire cutting notch

The blades of most FELCO pruning shears feature a notch that allows for the cutting of small wires without damaging the cutting edge.

Accessories



FELCO 300

Picking and Trimming Snip

For a clean cut



FELCO 310

Picking and Trimming Snip

For grape harvesting



FELCO 902

Sharpening tool

Sharpening stone



FELCO 903

Sharpening tool

Sharpener



FELCO 980

Maintenance product

Spray












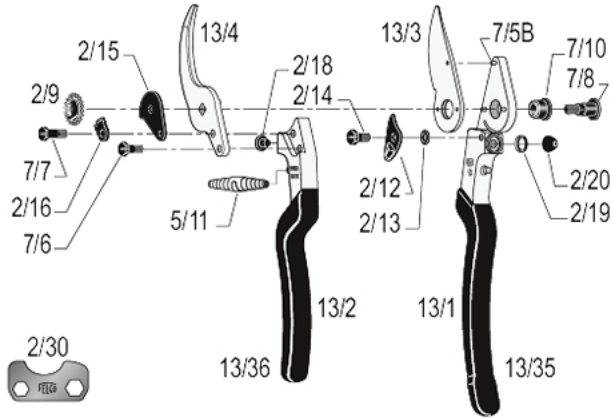







FELCO 990


















Maintenance product

Grease

Spare parts



| | REF. | Designation | Composition | UCC bar code |
|---|------|------------------------|--|---|
|  | 2/30 | Adjustment key | 1x 2/30 | |
|  | 13/3 | Blade | 1x 13/3 |  |
|  | 13/4 | Anvil-blade with screw | 1x 13/4 + 1x 7/6 |  |
|  | 7/90 | Kit | 1x 7/7 + 1x 2/16 + 1x 2/9 + 1x 7/8 |  |
|  | 5/91 | Kit | 2x 5/11 |  |
|  | 2/92 | Kit | 1x 2/15 + 1x 2/18 + 1x 2/14 + 1x 2/12 + 1x 2/13 + 1x 2/20 |  |
|  | 2/93 | Kit | 4x 2/18 + 6x 2/20 |  |
|  | 7/94 | Kit | 1x 2/9 + 1x 7/8 |  |
|  | 13/1 | Handle without blade | 1x 13/1 + 3x 7/5B + 1x 2/19 + 1x 2/20 + 1x 7/10 + 1x 2/13 + 1x 2/12 + 1x 2/14 + 1x 13/35 | |

| | | | |
|---|-------|----------------------------|------------------------------|
|  | 13/2 | Handle without anvil-blade | 1x 13/2 + 1x 2/18 + 1x 13/36 |
|  | 13/35 | Coating for blade handle | 1x 13/35 |
|  | 13/36 | Coating for blade handle | 1x 13/36 |
|  | 7/5B | Rivet for blade | 1x 7/5B |
|  | 7/6 | Screw for anvil-blade | 1x 7/6 |
|  | 7/8 | Bolt | 1x 7/8 |
|  | 2/9 | Nut | 1x 2/9 |
|  | 7/10 | Bush | 1x 7/10 |
|  | 5/11 | White spring | 1x 5/11 |
|  | 2/12 | Thumb catch | 1x 2/12 |
|  | 2/13 | Spring for thumb catch | 1x 2/13 |
|  | 2/14 | Screw for thumb catch | 1x 2/14 |
|  | 2/15 | Catch plate | 1x 2/15 |
|  | 2/16 | Locking segment | 1x 2/16 |
|  | 7/7 | Screw for locking segment | 1x 7/7 |
|  | 2/18 | Cushion | 1x 2/18 |
|  | 2/19 | Edging | 1x 2/19 |

Maintenance



Cleaning

It is advisable to clean your tool after each use.

If your tool is particularly dirty or subject to rusting after exposure to moisture, do not delay cleaning.



Oiling

After cleaning, it is advisable to oil the tool so as to protect it from corrosion. The oil will also unjam the tool.



Sharpening

It is advisable to sharpen your tool at least once a day, but if you feel that your tool is not cutting as well as usual, sharpen it right away!



Dismantling

It is advisable to dismantle your tool on a regular basis, but at the very latest when it appears to be jammed.

Replacement parts



Changing the blade

When the blade and the anvil-blade no longer cross, or when the blade is badly damaged, it is advisable to change it.

Regulate the working of the blade and anvil-blade by adjusting the tightening of the nut. The blade should rub against the anvil-blade over 2/3 of its length.



Changing the anvil-blade

When the blade and anvil-blade no longer cross and the anvil-blade is badly damaged, it is advisable to change it.



Changing the shock absorber

When the tool closes too abruptly during pruning, and the cushion is in good condition, the shock absorber should be changed.



Changing the cushion

When the tool closes too abruptly during pruning and the shock absorber is in good condition, the cushion must be changed.



Changing the thumb catch

When the thumb catch is damaged and loosens when used, even when the screw is readjusted, change it.



Changing the plastic coatings for handles

If the coatings are badly damaged, you can replace them.

Soak the coatings for 2 minutes in boiling water - recommended glue: Loctite 415.